



Tel. +41 44 860 2233  
Fax: +41 44 860 2616  
GSM: +41 79 403 5555


**Security Printing Consulting AG**

Büelrebenstr. 10, CH-8185 Winkel/ZH, **Switzerland**  
e-mail: [info@spc-ag.ch](mailto:info@spc-ag.ch) web: [www.spc-ag.ch](http://www.spc-ag.ch)

---

# SPC AL1200

## Automatic Laminator

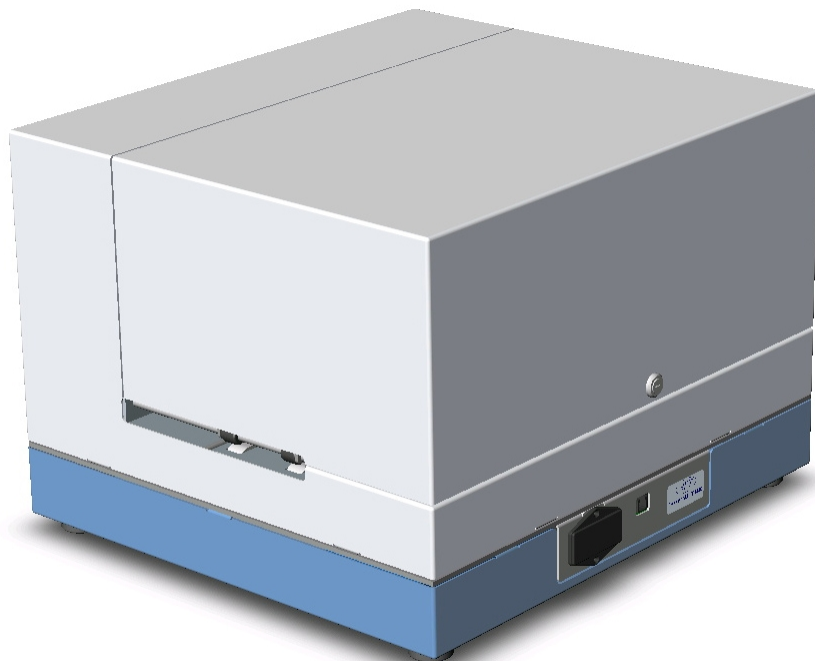



## AL1200

The passport roller laminator AL1200 is for processing of thin resin layer laminates <12 µm from reels.

### Main features:

- Module for use as stand alone unit
- Foil registration possible according to print marks or holographic marks for perfect registration on the data page
- Adjustable laminating temperature and processing speed
- Roll outer diameter up to 120 mm (500 labels per roll)
- Transparent cover optional on request

## Technical data

<b>Dimensions</b>		
	L x W x H	480 x 510 x 340 mm
	Gross weight	Approx. 31 kg
<b>Foundation/flooring</b>		
Temperature	Operation	10 °C - 35 °C
	Storage	- 20 °C - +55 °C
<b>Working Parameters</b>		
Laminating	Temperature stepless	up to 250°C
	Working speed	1 to 10 mm per second
	Temperature tolerance	± 0.5°C
	Start up time	< 2 Minutes
<b>Ambient conditions</b>		
Relative humidity	Operation	+25 °C - 80 % RH (not condensed)
	Storage	+25 °C - 90 % RH (not condensed)
<b>Lighting conditions</b>		
	Illumination level	No direct sunlight
<b>Other Conditions</b>		
EMC Air purity	In conformity with the CE-standard Comparable to standard office conditions	
<b>Electricity</b>		
	Voltage	110 V - 240 V alternating current, manual
	Frequency	50 Hz – 60 Hz
	Rated current	1 A
	Power consumption	ca. 900 W